

# LifeWindow<sup>®</sup> Lite series

Networked Multi-Parameter Veterinary Monitors





# Lite series



## Clinically Validated Measurements

Veterinary specific algorithms.



**Digicare AnimalEKG™**



**Masimo® SET® SpO2**



**Suntech® VetBP**



**Digicare TrueTemp™**

Advanced Measurements  
(Optional)



CO2



A-Gas



IBP



FiO2

## Veterinary Specific Profiles

Automatically configured by patient weight. Patient Profiles adjust alarm limits and selects the correct algorithms needed for the most precise and accurate readings



Large



Small



Exotic Small



## Superior Trends Technology


### Tabular

| January 10 | 1:50 PM | 1:45 PM | 1:40 PM | 1:35 PM | 1:30 PM |
|------------|---------|---------|---------|---------|---------|
| ECG        | 70      | 70      | 70      | 70      | 70      |
| SpO2       | 98      | 98      | 98      | 98      | 98      |
| BP         | 78      | 78      | 78      | 78      | 78      |
| IBP        | 5.1     | 5.1     | 5.1     | 5.1     | 5.1     |
| FiO2       | 38      | 38      | 38      | 38      | 38      |
| Temp       | 22      | 22      | 22      | 22      | 22      |
| Temp 1     | 98.7    | 98.7    | 98.7    | 98.7    | 98.7    |
| Temp 2     | 100.4   | 100.4   | 100.4   | 100.4   | 100.4   |


### Graphical



### Histogram




### On screen




## Highlights



LW Lite

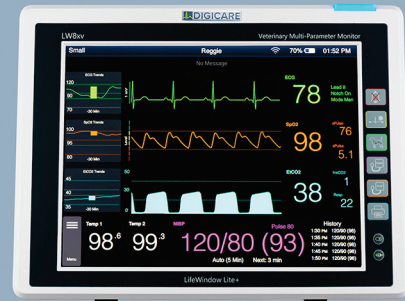


LW Lite+



8.4 inch

Super Bright  
Capacitive Touchscreen



12.1 inch

Capacitive Touchscreen




Light Weight



Wi-Fi  
Optional



L.E.D. Alarm  
Indicator




HDMI



Up to 3 Hour  
Battery

## Networking and Reports




Excel and PDF  
Reports



Remote Access  
from anywhere



Transfer Records  
to a PMS



Smart Flow  
Integration

## Additional Specifications

- Waveform sweep speeds from 6.25mm/s up to 200mm/s for high heart rate.
- Optional Nonin SpO2 for up to 450 BPM
- Optional Arrhythmia detection and ST segment elevation and depression measurements
- Capable of detecting heart rates up to 999 BPM for exotics and lab animals.

- Waveforms auto-scale for ECG and IBP
- Supports Multi-gas

### Model 8.4" LW8sv

- Dimensions W 9.25", H 6.89", D 6.49"
- Weight 8.7lb

### Model 12.1" LW8xv

- Dimensions W 12.99", H 10.43", D 7.87"
- Weight 10.5lb

Designed and Manufactured in America

## Contact Us

Email: [sales@digicarebiomedical.com](mailto:sales@digicarebiomedical.com)

Phone: 1-561-689-0408

Learn More at  
[www.digi-vet.com](http://www.digi-vet.com)

